



Installation Manual

THM_2000 Series


2-way / 3-way Thermostatic Control Valve

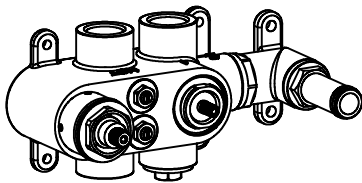


**2-Way Rough In
HW2600.RI**

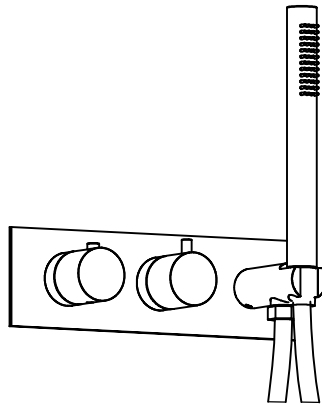


**2-Way Trim Set
HW2602.TR**

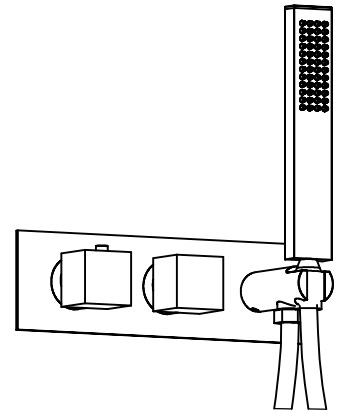


**2-Way Trim Set
HW2605.TR**

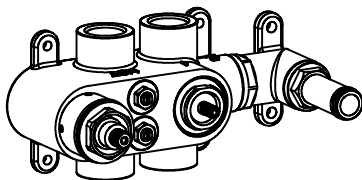

**3-Way Rough In
HW2700.RI**

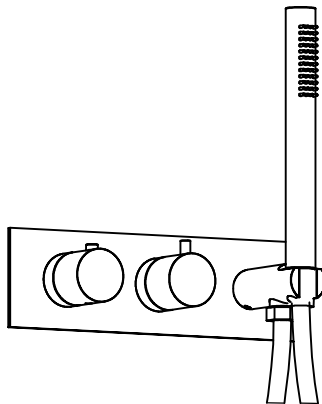


**3-Way Trim Set
HW2702.TR**

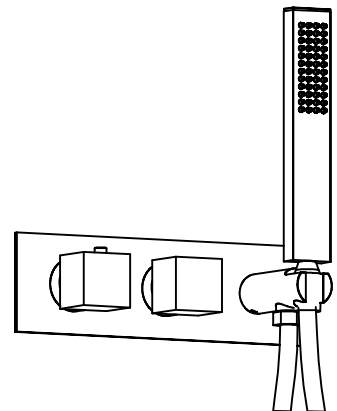


**3-Way Trim Set
HW2705.TR**

1. Connection

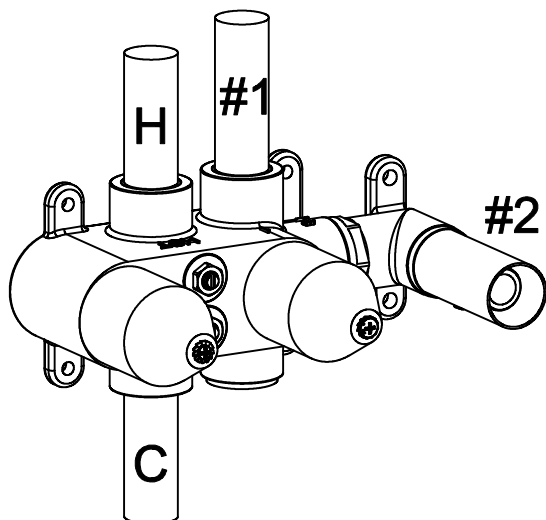


2-Way Connection

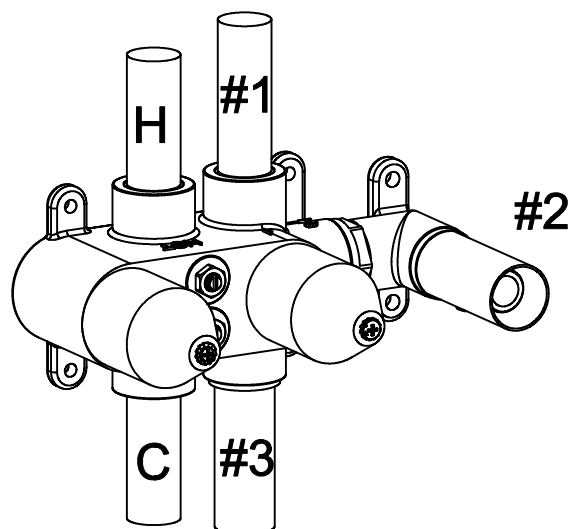


3-Way Connection

2. Cut-Out Dimension

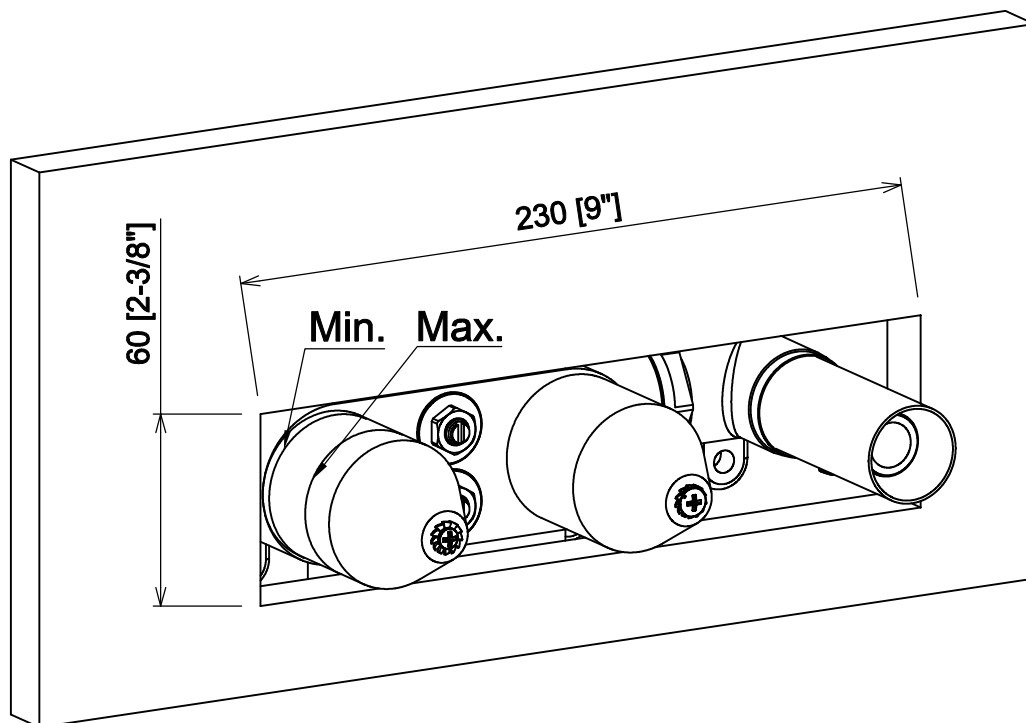

Finished Wall Must Between Min. & Max.


3. Trim Installation

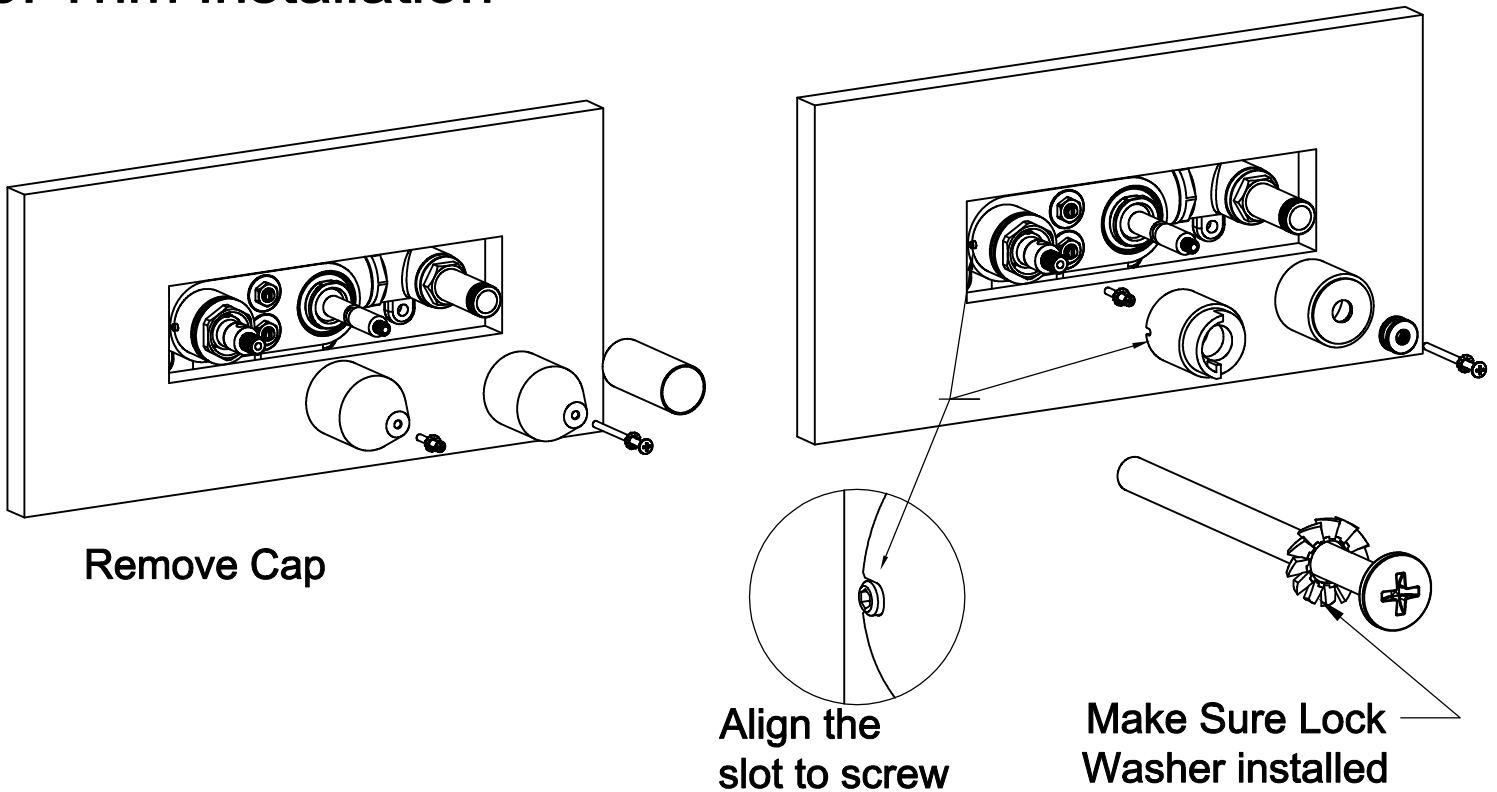



4. Temperature Calibrate

Black Mark align the slot to Factory 38° Calibration


For Some Cases ,
Need to adjust the
cartridge calibrate
the Temperature to
38°

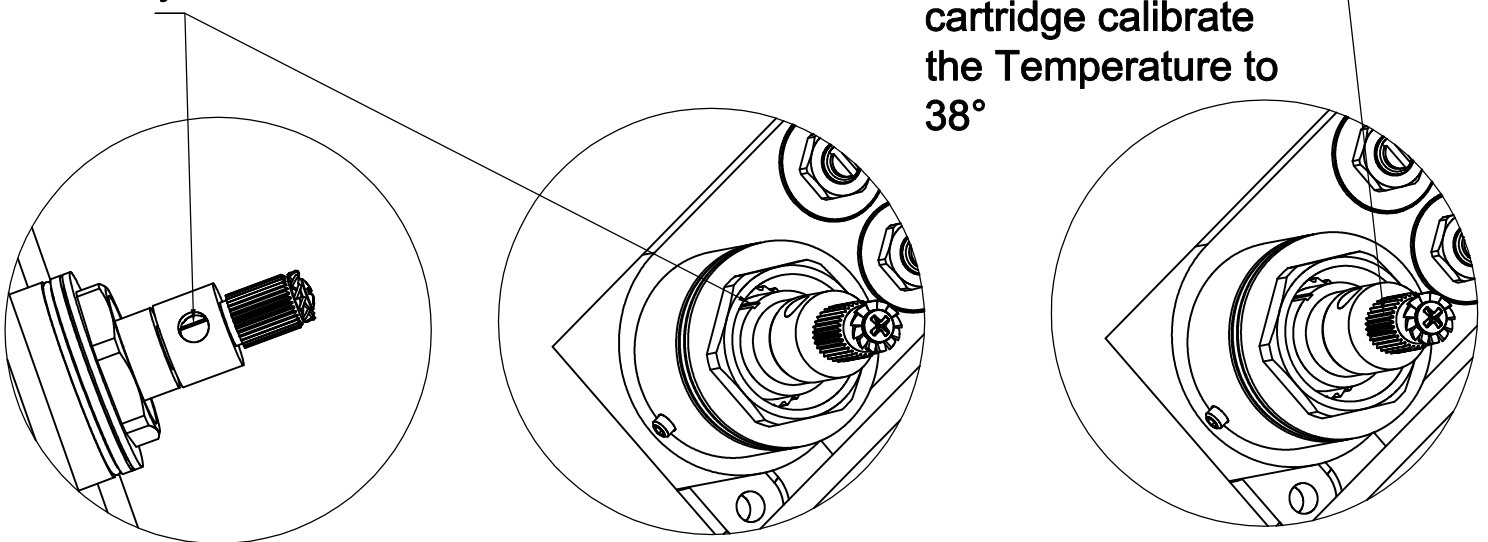

5. Front Plate & Handle Installation

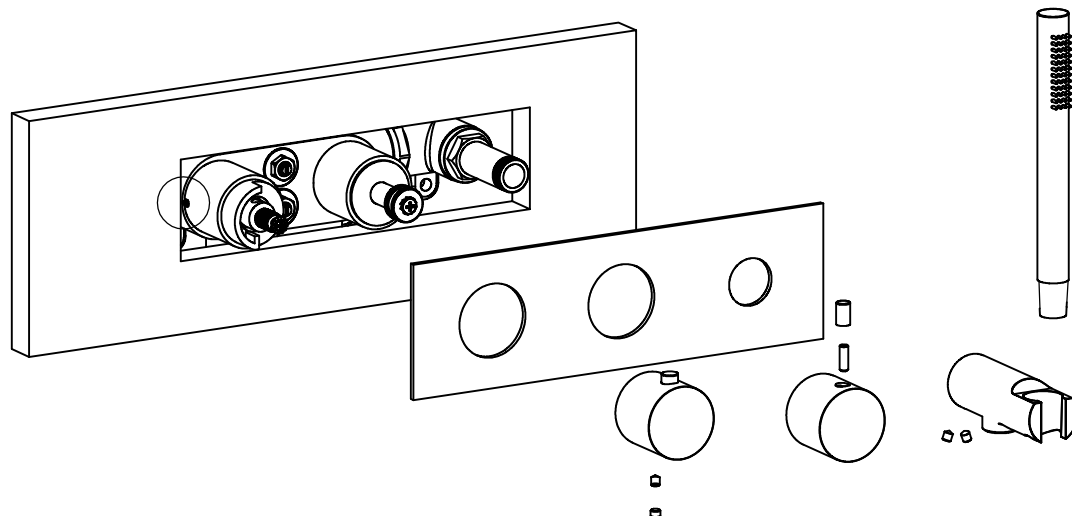

2-way



3-way

Adjust Diverter Handle
to the Right Position

6. Finish Installation

